


WDH-610HA-12R

DEHUMIDIFIER

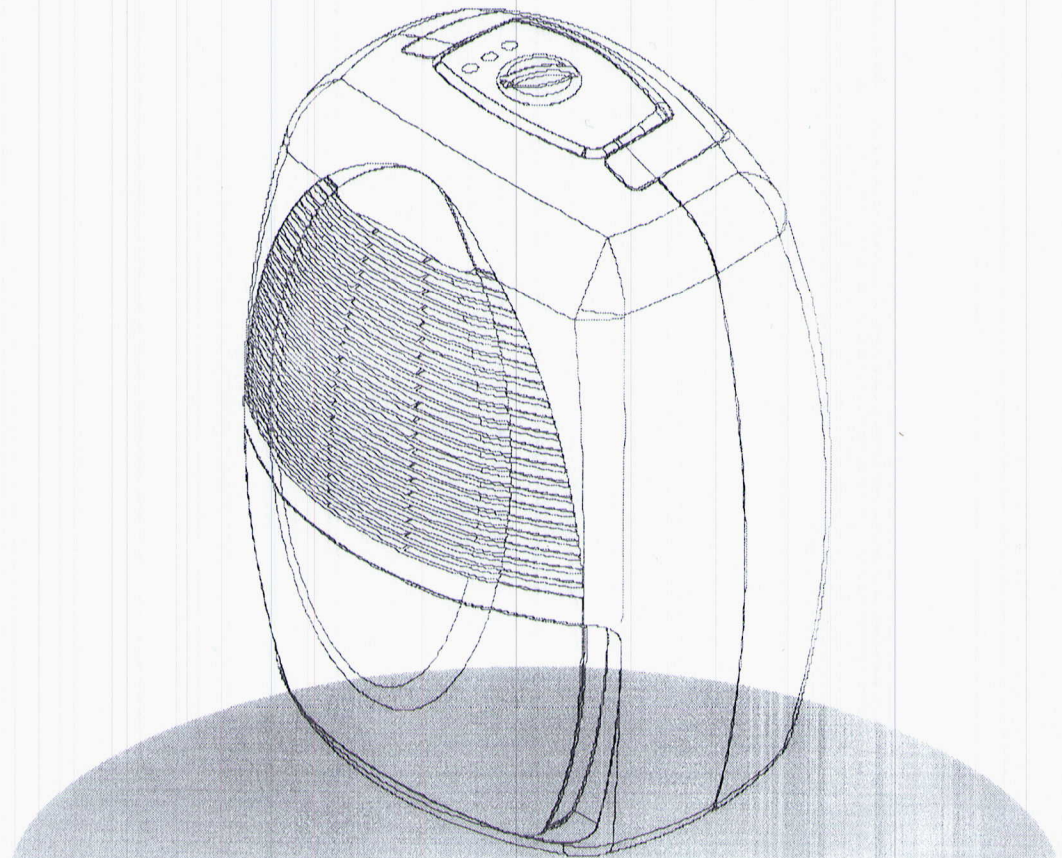


CONTENTS

WARNING / CAUTION	1
DESCRIPTION OF COMPONENTS	
FUNCTION EXPLANATION	2
OPERATION INSTRUCTIONS	3
CONTINUOUS DRAINAGE	4
CAUTIONS	5
MAINTENANCE / EMERGENCY	6
SPECIFICATION	LAST PAGE


USER'S MANUAL

CAUTION


- Do not fold the power cord as shown below !




- Make sure the plug is placed fully & firm into the socket !




- Do not use multiple socket as shown below !




- Make sure the plug is clean !



- After turning the unit off, please take plug out of the socket.




- Do not have wet hands when connecting the power plug.




WARNIN


- Do not place anything on top of the control panel !

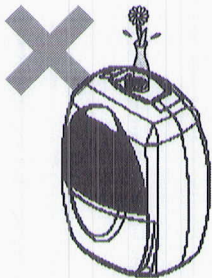


- Do not place anything over the inlet or outlet points.

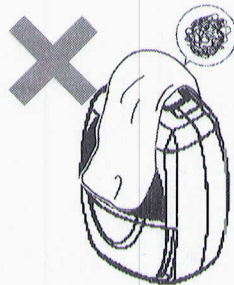


- Do not let children by play with the unit or control !

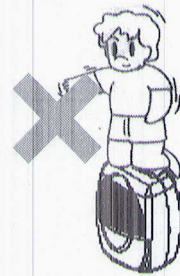

- Do not wet the machine or the control panel !

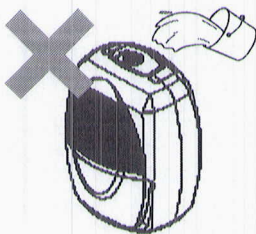


- Keep the flammable gas/oil away from the machine !

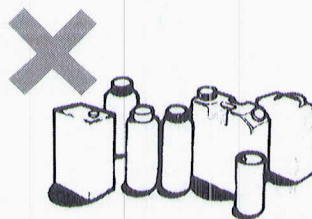

- Ask professionals to do the servicing !



DESCRIPTION OF COMPONENTS

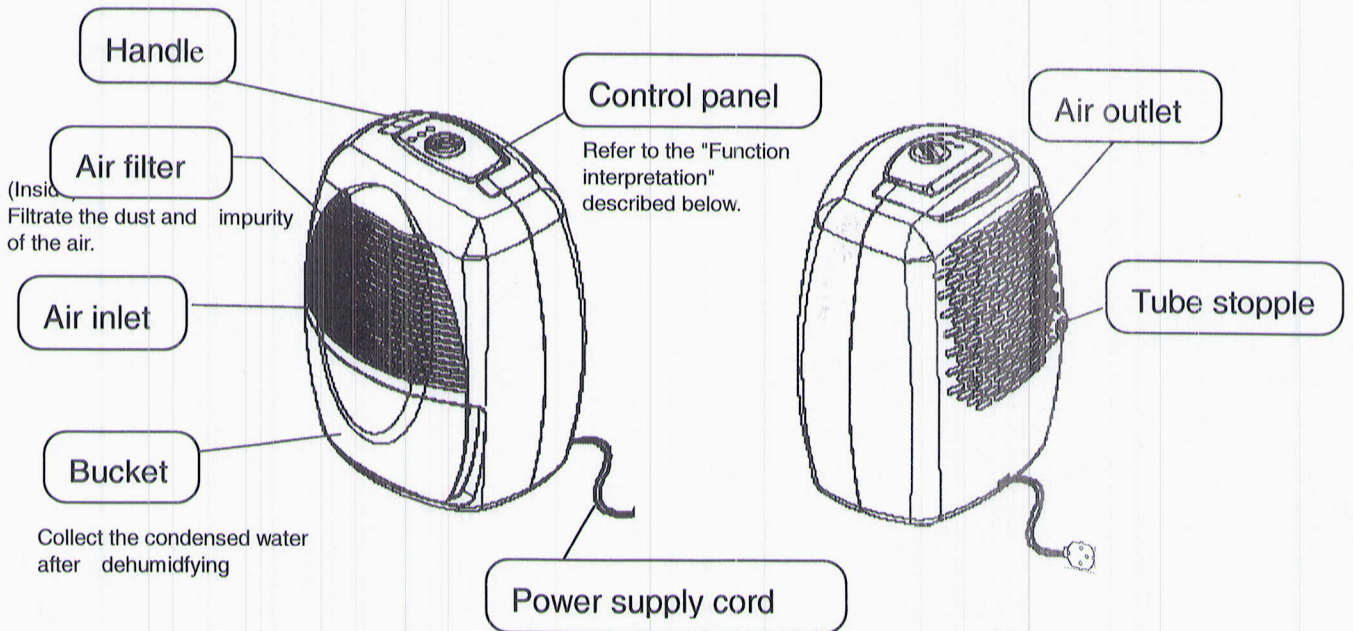

FUNCTIONS INTERPRETATION

Defrost indicator


B Type: With defrost function.
The indicator is ON when the defrost function is in operation..

Bucket full indicator

When the bucket is full of water, the dehumidifier will stop operating automatically and the bucket full indicator will be ON.

Operation indicator

The indicator is ON when the dehumidifier is in operation.

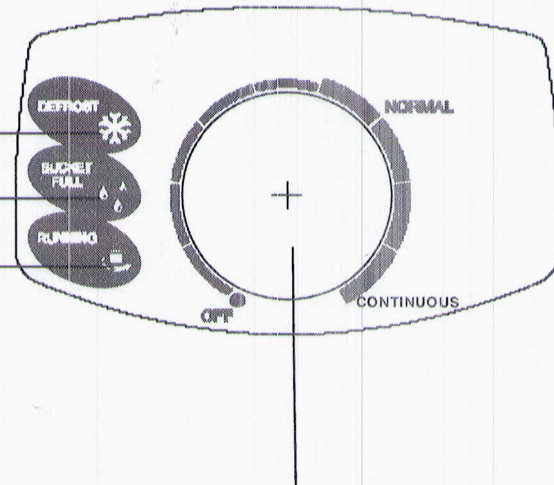

Humidity control knob

OFF	Unit stops dehumidifying .
NORMAL	Humidity controlled automatically between 50%-70%RH approximately.
CONTINUOUS	Dehumidifier continuously removes moisture.



OPERATING INSTRUCTIONS

Start operation

- 1 Make sure the bucket is placed in proper position. (In case the Full Bucket Indicator is ON when you take the unit out of the carton and do plugging in, please pull the bucket out then push it back).
- 2 Make sure the plug is firmly plugged in the socket. (Before plugging in, make sure the Humidity control knob is OFF).
3. Turn clockwise the Humidity control knob to a suitable level of humidity (Generally it means 50%-70%RH in the position "NORMAL"). If indoor humidity is over preset level, the unit will start dehumidifying.
4. When the indoor humidity is below the preset level, the unit will stop operating.
5. When the indoor humidity is higher than the preset level, the unit will start dehumidifying.
6. The cycle of above mentioned operating ways in 3,4,5 will maintain the humidity according to the preset level

When Full Bucket Indicator is ON

When the bucket is full of water, the Full Bucket Indicator will be ON, and the dehumidifier will automatically stop operating at the same time. Remove water from the bucket, then put it back in the original position, dehumidifier will start operating again.

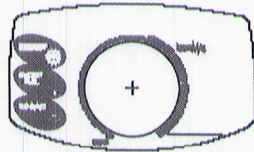

Please use both hands to carefully empty the water tank.

When the Defrost Indicator is ON.(B-Type)

If the ambient temperature is too low (below 18°C), the dehumidifier will start defrosting automatically. In this situation, defrost Indicator is ON.

* When the air filter is too dirty, the Defrost Indicator is ON also.





This unit has 3-min lag due to the device for protecting circuit. In order to prolong the compressor's working life, the compressor does not start until the unit has run for 3 minutes. Do not use the extension cord or the same

EMERGENCY

Please unplug the unit immediately when there is any abnormal symptom. Contact service department of our company for solving the problem. Do not disassemble the dehumidifier by yourself to avoid danger!


CONTINUOUS DRAINAGE

The function of continuous drainage can be started in following steps when there is a good condition of drainage near by the unit.
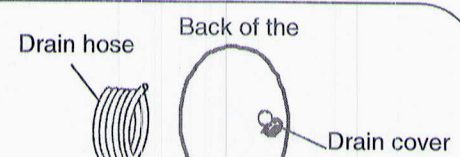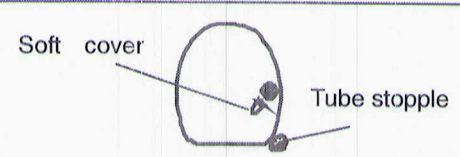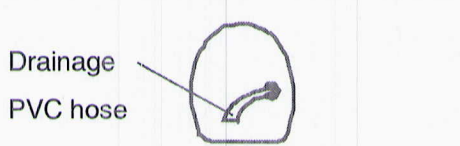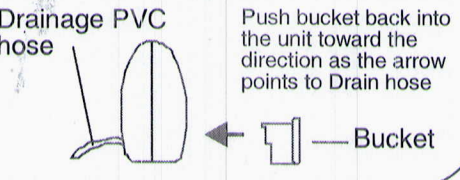
<ol style="list-style-type: none"> 1. Prepare PVC hose to drain out water (The hose sold in market with inner dia.13mm) 2. Take out the stopple of the drainage outlet . 	 <p>Drain hose Back of the Drain cover</p>
<ol style="list-style-type: none"> 3. Take out the soft cover, put it and tube stopple into the bucket for storage. 	 <p>Soft cover Tube stopple</p>
<ol style="list-style-type: none"> 4. Connect the PVC hose with the drainage outlet. 	 <p>Drainage PVC hose</p>
<ol style="list-style-type: none"> 5. Place the bucket on its original location. 	 <p>Drainage PVC hose Push bucket back into the unit toward the direction as the arrow points to Drain hose Bucket</p>

INSTALLING DRAINAGE PVC HOSE

When using the function of continuous drainage, the PVC hose must be placed horizontally below the drainage hole. Must avoid uneven ground and folding the hose.

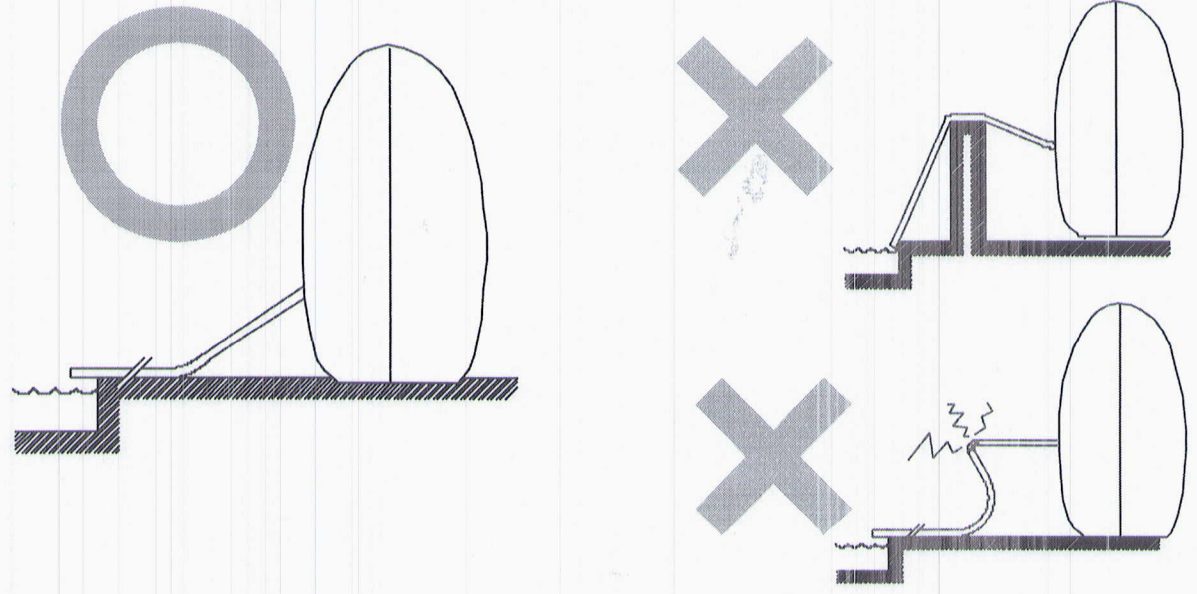


CAUTIONS


- Do not pull the power cord to avoid broken cord, which lead to danger.



- Do not use insect, oil or paint spray around the machine, it might cause damage to the plastic parts or start a fire.

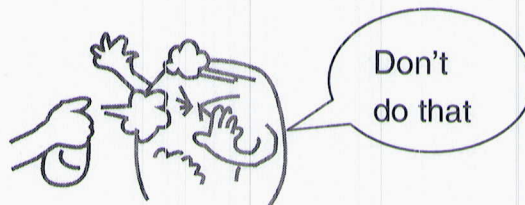

- Do not place the machine on an uneven ground, to avoid shaking, noise and leakage of water.

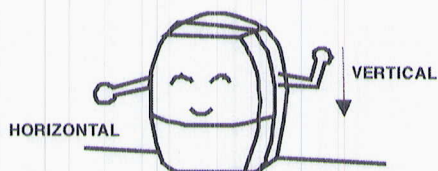


- Please always keep the unit 20 cm away from the wall to dissipate the heat properly.


Above 20cm away
from the wall



- It is dangerous to put anything into the machine.

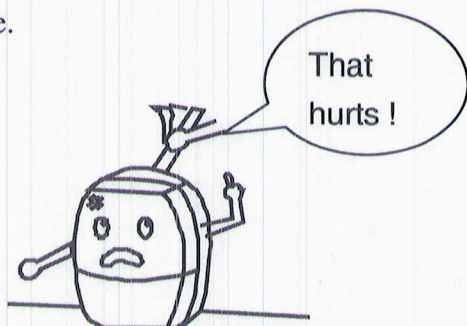


- Close all the open windows to reach the maximum possible efficiency of removing moisture.

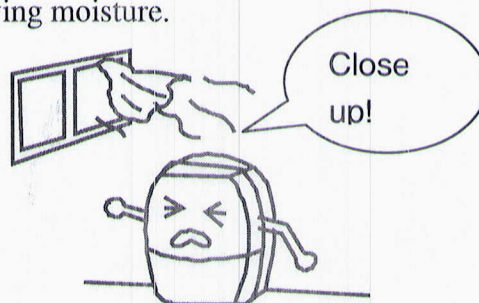

- Keep the machine away from any type of heat sources.




- When moving or put in storage, do not place the dehumidifier on side way or upside down and avoid violent shaking.

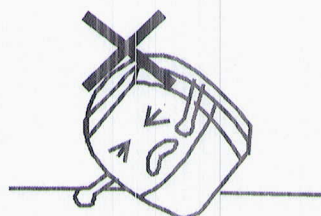

MAINTENANCE

For safety reasons, make sure the dehumidifier is unplugged before serving or cleaning the machine.




1) Clean the Shell :

- A. Wipe the shell using soft and clean cloth.
- B. If the dehumidifier is very dirty, please use mild detergent then wipe off the detergent with half dried cloth.
- C. Do not wash the machine with a hose, it will cause leakage of electricity.

2) Air filter cleaning:

Air filter can filtrate the dust and impurity of the air, and the filter blocked by the dust will influence the dehumidifying function, therefore you'd better clean it once per two weeks for ensuring the dehumidifying function during use.

- A. Firstly tilt backwards the dehumidifier by 15 degree, and pull the air filter downwards by hand then, a little bit forwards, pull the filter out.



- B. After cleaning the air filter with vacuum cleaner or cleaning it with water, place it on shady and cool location for drying.

EMERGENCY

If a problem occurs, unplug the machine and contact a qualified serving center immediately. Do not disassemble the dehumidifier yourself !

SPECIFICATION

MODEL	WDH-610HA-12R
POWER	220-240V~50Hz
MOISTURE REMOVAL	10L/Day(30°C 80%RH)
REFRIGERANT	R-134a
POWER INPUT	180W
SIZE OF SHELL (H × W × D)	435x321x258mm
WEIGHT	8.6kg
OPERATING TEMPERATURE	5°C ~ 35°C

(EC) No. 842/2006:

Do not vent R-134a into atmosphere: R-134a is a fluorinated greenhouse gas, covered by Kyoto Protocol, with a Global Warming Potential (GWP) = 1300.

- If the power cord on this unit is damaged it must be replaced by the manufacturer, its service agent or qualified persons in order to avoid a hazard .
- This appliance is not intended for use by children or other persons without assistance or supervision if their physical, sensory or mental capabilities prevent them from using it safely. Children should be supervised to ensure that they do not play with the appliance.

Waste electrical products should not be disposed of with household waste.
Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

